

NBS  
PUBLICATIONS

REF

# American National Standard

Adopted for Use by  
the Federal Government

FIPS PUB 129

See Notice on Inside  
Front Cover

for information systems –

## optical character recognition (OCR) – matrix character sets for OCR-MA

american national standards institute, inc.  
1430 broadway, new york, new york 10018

JK

468

.A8A3

#129

1987

This standard has been adopted for Federal Government use.

Details concerning its use within the Federal Government are contained in Federal Information Processing Standards Publication 129, Optical Character Recognition (OCR) — Dot Matrix Character Sets for OCR-MA. For a complete list of the publications available in the Federal Information Processing Standards Series, write to the Standards Processing Coordinator (ADP), Institute for Computer Sciences and Technology, National Bureau of Standards, Gaithersburg, MD 20899.

Research Information Center  
National Bureau of Standards  
Gaithersburg, Maryland 20899

ANSI®  
X3.111-1986

NBSR  
JK468  
.A8A3  
no 129  
1987

American National Standard  
for Information Systems –  
**Optical Character Recognition (OCR) –  
Matrix Character Sets for OCR-MA**

Secretariat

**Computer and Business Equipment Manufacturers Association**

Approved April 24, 1986

**American National Standards Institute, Inc**

**Abstract**

This standard provides the description of the positions and the sizes of dot patterns to be used in the application of matrix printing and recognition for optical character recognition systems. The three different groups, designated OCR-MA1, OCR-MA2, and OCR-MA3, are used to describe the character sets that can be achieved with different matrix resolutions. The four matrix resolutions covered by this standard are  $5 \times 7$ ,  $7 \times 7$ ,  $7 \times 9$ , and  $9 \times 9$  (columns  $\times$  rows).

# American National Standard

Approval of an American National Standard requires verification by ANSI that the requirements for due process, consensus, and other criteria for approval have been met by the standards developer.

Consensus is established when, in the judgment of the ANSI Board of Standards Review, substantial agreement has been reached by directly and materially affected interests. Substantial agreement means much more than a simple majority, but not necessarily unanimity. Consensus requires that all views and objections be considered, and that a concerted effort be made toward their resolution.

The use of American National Standards is completely voluntary; their existence does not in any respect preclude anyone, whether he has approved the standards or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standards.

The American National Standards Institute does not develop standards and will in no circumstances give an interpretation of any American National Standard. Moreover, no person shall have the right or authority to issue an interpretation of an American National Standard in the name of the American National Standards Institute. Requests for interpretations should be addressed to the secretariat or sponsor whose name appears on the title page of this standard.

**CAUTION NOTICE:** This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute.

Published by

**American National Standards Institute  
1430 Broadway, New York, New York 10018**

Copyright © 1987 by American National Standards Institute, Inc.  
All rights reserved.

No part of this publication may be reproduced in any form,  
in an electronic retrieval system or otherwise, without  
the prior written permission of the publisher.

Printed in the United States of America

A2M1187/9

# Foreword (This Foreword is not part of American National Standard X3.111-1986.)

This standard presents matrix character sets for use in optical character recognition systems. These characters are meant to be similar in shape to those shown in American National Standard Character Set for Optical Character Recognition (OCR-A), ANSI X3.17-1981. However, there are variations in conformance to OCR-A shapes for the different sets of characters depending on the matrix resolution of the printed characters. The character set chosen will depend upon the application. This standard defines the character shapes created by printing devices that generate characters by means of a matrix of dots with a contrasting background. Unlike OCR-A, where the emphasis is on reading performance, this standard has been written to reduce printing constraints to a level that will allow lower resolution printers to be usefully applied for OCR applications.

Matrix printing is increasingly being used because of the ease of generating characters of this type with the use of digital computers. This need was recognized by the European Computer Manufacturers Association with the creation of ECMA-51, Implementation of the Numeric OCR-A Font with  $9 \times 9$  Matrix Printers, and ECMA-42, Alphanumeric Character Set for  $7 \times 9$  Matrix Printers. The need was also recognized by the German Standards Institute with the creation of DIN 66008, Font A for Optical Character Recognition: Character Representation by Dots within  $9 \times 9$  Matrix Dimensions. As in this standard, the characters were defined by a specific combination of "dots" on a fixed grid. This American National Standard limits the printer to a specific placement of dots on a grid, and the print quality requirements that shall be met regardless of the dot matrix used.

Three different groups (OCR-MA1, OCR-MA2, and OCR-MA3) are defined and the character sets for these groups are shown in Table 1. OCR-MA1 can be met with  $5 \times 7$ ,  $7 \times 7$ ,  $7 \times 9$ , and  $9 \times 9$  matrices. OCR-MA2 can be met with  $7 \times 7$ ,  $7 \times 9$ , and  $9 \times 9$  matrices. The OCR-MA3 characters can be obtained with the  $7 \times 9$  and the  $9 \times 9$  matrices.

In all cases, the  $9 \times 9$  matrix is the recommended matrix for the best scanning results. The  $7 \times 9$  matrix is the first alternate, the  $7 \times 7$  is the second alternate, and the  $5 \times 7$  is the last alternate recommended. The  $9 \times 9$  matrix characters, illustrated in Figures 7 through 58, and the  $7 \times 7$  matrix characters, illustrated in Figures 110 through 139, are designed to increase printer throughput by imposing the restriction that there are no dots on adjacent horizontal positions.

Matrices with resolutions of higher densities than  $9 \times 9$  are not specifically covered in this standard. However, higher resolution printers can create characters that meet the requirements of this standard. Often this can be accomplished by using a group of small dots closely spaced to create the same effect as one larger dot. High resolution matrix printers can also be used to create OCR-A characters that fall within the quality requirements and characters shape requirements of ANSI X3.17-1981.

Suggestions for improvement of this standard will be welcome. They should be sent to the Computer and Business Equipment Manufacturers Association, 311 First Street, NW, Suite 500, Washington, DC 20001.

This standard was processed and approved for submittal to ANSI by Accredited Standards Committee on Information Processing Systems, X3. Committee approval of the standard does not necessarily imply that all committee members voted for its approval. At the time it approved this standard, the X3 Committee had the following members:

Edward Lohse, Chair  
Richard Gibson, Vice-Chair  
Catherine A. Kachurik, Administrative Secretary

<i>Organization Represented</i>	<i>Name of Representative</i>
American Express . . . . .	D. L. Seigal Lucille Durfee (Alt)
American Library Association . . . . .	Paul Peters
American Nuclear Society . . . . .	Geraldine C. Main D. R. Vondy (Alt)
AMP Incorporated . . . . .	Patrick E. Lannan Edward Kelly (Alt)
Association for Computing Machinery . . . . .	Kenneth Magel Jon A. Meads (Alt)
Association of the Institute for Certification of Computer Professionals . . . . .	Thomas M. Kurihara
AT&T Communications . . . . .	Henry L. Marchese Richard Gibson (Alt)
AT&T Technologies . . . . .	Herbert V. Bertine Paul D. Bartoli (Alt)
Burroughs Corporation . . . . .	Stanley Fenner
Control Data Corporation . . . . .	Charles E. Cooper Keith Lucke (Alt)
Cooperating Users of Burroughs Equipment . . . . .	Thomas Easterday Donald Miller (Alt)
Data General Corporation . . . . .	John Pilat Lyman Chapin (Alt)
Data Processing Management Association . . . . .	Christian G. Meyer
Digital Equipment Computer Users Society . . . . .	William Hancock Charles Mustain (Alt)
Digital Equipment Corporation . . . . .	Gary S. Robinson Delbert L. Shoemaker (Alt)
Eastman Kodak . . . . .	Charleton C. Bard Gary Haines (Alt)
General Electric Company . . . . .	William R. Kruesi Richard W. Signor (Alt)
General Services Administration . . . . .	William C. Rinehuls Larry L. Jackson (Alt)
GUIDE International . . . . .	Frank Kirshenbaum Thomas F. O'Leary, Jr (Alt)
Harris Corporation . . . . .	Walter G. Fredrickson Rajiv Sinha (Alt)
Hewlett-Packard . . . . .	Donald C. Loughry
Honeywell Information Systems . . . . .	Thomas J. McNamara David M. Taylor (Alt)
IBM Corporation . . . . .	Mary Anne Gray Robert H. Follett (Alt)
IEEE Computer Society . . . . .	Sava I. Sherr Thomas M. Kurihara (Alt)
Lawrence Berkeley Laboratory . . . . .	Thomas A. Varetoni (Alt) David F. Stevens
Moore Business Forms . . . . .	John S. Colonias (Alt)
National Bureau of Standards . . . . .	Delmer H. Oddy Robert E. Rountree
National Communications System . . . . .	James Moulton (Alt) Marshall L. Cain
NCR Corporation . . . . .	George W. White (Alt) Thomas W. Kern
Prime Computer, Inc . . . . .	A. Raymond Daniels (Alt) Joseph Schmidt
Railinc Corporation . . . . .	John McHugh (Alt) R. A. Petrash
Recognition Technology Users Association . . . . .	Herbert F. Schantz G. W. Wetzel (Alt)
Scientific Computer Systems Corporation . . . . .	James A. Baker Carl Haberland (Alt)
SHARE, Inc . . . . .	Thomas B. Steel Robert A. Rannie (Alt)
Sperry Corporation . . . . .	Marvin W. Bass Jean G. Smith (Alt)
Texas Instruments, Inc . . . . .	Presley Smith Richard F. Trow, Jr (Alt)
3M Company . . . . .	J. Wade Van Valkenburg R. C. Smith (Alt)
Travelers Insurance Companies, Inc. . . . .	Joseph T. Brophy
U.S. Department of Defense . . . . .	Fred Virtue Belkis Leong-Hong (Alt)



<i>Organization Represented</i>	<i>Name of Representative</i>
VIM. . . . .	Chris Tanner
VISA U.S.A. . . . .	Madeline Sparks (Alt)
	Jean T. McKenna
	Susan Crawford (Alt)
Wang Laboratories, Inc. . . . .	Marsha Hayek
	Joseph St. Amand (Alt)
Xerox Corporation . . . . .	John L. Wheeler

Subcommittee X3A1 on Optical Character Recognition, which developed this standard, had the following members:

T. Bagg, Chair	C. E. Biss	S. McIntosh
R. Monell, Vice-Chair	S. Blanc	G. Martin
C. P. Newman, Secretary	R. C. Bloss	S. Miller
	J. Crawford	J. Nelson
	J. E. DeSautels	D. Newton
	W. P. Foster	D. Oddy
	J. Freedman	L. Richards
	A. Gillidatta	G. Robertson
	G. Goukler	H. F. Schantz
	J. A. Hopkins	N. C. Selke
	R. M. Ireland	A. Taft
	T. B. Janning	E. Thompson
	D. Keller	P. J. Traglia
	C. Knoedel	N. R. Weiland
	E. C. Korzeniewski	G. W. Wetzel
	J. McDonnell	

The X3A1 Working Group 1 on Character Shapes, which had the technical responsibility during the development of this standard, had the following members:

P. J. Traglia, Chair	T. Bagg
R. Bloss, Secretary	C. E. Biss
	S. Blanc
	J. DeSautels
	W. P. Foster
	J. Freedman
	A. Gillidette
	J. McDonnell
	R. Monell
	S. Miller
	D. Oddy
	G. Robertson
	H. Schantz
	E. Thompson
	N. Weiland

Other persons who made technical contributions are:

G. Brown  
G. K. Godwin  
H. Lidkea

A special thanks is given to Norm Weiland for the preparation of the innumerable draft manuscripts and character layouts.

# Contents

## SECTION

## PAGE

1. Scope, Purpose, and Application . . . . .	11
1.1 Scope . . . . .	11
1.2 Purpose . . . . .	11
1.3 Application . . . . .	11
2. Referenced and Related Standards . . . . .	11
2.1 Referenced American National Standards. . . . .	11
2.2 Related Standards . . . . .	11
3. Definitions. . . . .	12
4. Characters . . . . .	12
4.1 Character Shapes. . . . .	12
4.2 Character Repertoire . . . . .	12
4.3 Use of Characters . . . . .	14
4.4 Relative Character Spacing . . . . .	14
4.5 Print Quality . . . . .	14
Table 1 OCR-MA Character Repertoire. . . . .	13

## Figures

Figure 1	Dot Size Dimensions . . . . .	16
Figure 2	5 × 7 Matrix Dimensions . . . . .	16
Figure 3	7 × 7 Matrix Dimensions . . . . .	16
Figure 4	7 × 9 Matrix Dimensions . . . . .	17
Figure 5	9 × 9 Matrix Dimensions . . . . .	17
Figure 6	Minimum PCS as a Function of Dot Size . . . . .	17
Figure 7	Number One 9 × 9 . . . . .	18
Figure 8	Number Two 9 × 9 . . . . .	18
Figure 9	Number Three 9 × 9 . . . . .	18
Figure 10	Number Four 9 × 9. . . . .	18
Figure 11	Number Five 9 × 9 . . . . .	18
Figure 12	Number Six 9 × 9. . . . .	18
Figure 13	Number Seven 9 × 9 . . . . .	18
Figure 14	Number Eight 9 × 9 . . . . .	18
Figure 15	Number Nine 9 × 9. . . . .	18
Figure 16	Preferred Number Zero 9 × 9 . . . . .	18
Figure 17	Letter A 9 × 9 . . . . .	18
Figure 18	Letter B 9 × 9 . . . . .	18
Figure 19	Letter C 9 × 9 . . . . .	18
Figure 20	Letter D 9 × 9 . . . . .	18
Figure 21	Letter E 9 × 9 . . . . .	18
Figure 22	Letter F 9 × 9 . . . . .	18
Figure 23	Letter G 9 × 9 . . . . .	19
Figure 24	Letter H 9 × 9 . . . . .	19
Figure 25	Letter I 9 × 9. . . . .	19
Figure 26	Letter J 9 × 9. . . . .	19
Figure 27	Letter K 9 × 9 . . . . .	19
Figure 28	Letter L 9 × 9 . . . . .	19
Figure 29	Letter M 9 × 9. . . . .	19
Figure 30	Letter N 9 × 9 . . . . .	19
Figure 31	Letter O 9 × 9 . . . . .	19
Figure 32	Preferred Letter P 9 × 9. . . . .	19
Figure 33	Letter Q 9 × 9 . . . . .	19
Figure 34	Preferred Letter R 9 × 9. . . . .	19



Figure 35	Letter S 9 × 9 . . . . .	19
Figure 36	Letter T 9 × 9 . . . . .	19
Figure 37	Letter U 9 × 9 . . . . .	19
Figure 38	Letter V 9 × 9 . . . . .	19
Figure 39	Letter W 9 × 9 . . . . .	20
Figure 40	Letter X 9 × 9 . . . . .	20
Figure 41	Letter Y 9 × 9 . . . . .	20
Figure 42	Letter Z 9 × 9 . . . . .	20
Figure 43	Symbol Hook 9 × 9 . . . . .	20
Figure 44	Symbol Chair 9 × 9 . . . . .	20
Figure 45	Symbol Fork 9 × 9 . . . . .	20
Figure 46	Plus Sign 9 × 9 . . . . .	20
Figure 47	Minus Sign 9 × 9 . . . . .	20
Figure 48	Period (Decimal Point) 9 × 9 . . . . .	20
Figure 49	Slant 9 × 9 . . . . .	20
Figure 50	Dollar Sign 9 × 9 . . . . .	20
Figure 51	Greater Than Sign 9 × 9 . . . . .	20
Figure 52	Quotation Mark 9 × 9 . . . . .	20
Figure 53	Comma 9 × 9 . . . . .	20
Figure 54	Yen Sign 9 × 9 . . . . .	20
Figure 55	Less Than Sign 9 × 9 . . . . .	21
Figure 56	Alternate Number Zero 9 × 9 . . . . .	21
Figure 57	Alternate Letter P 9 × 9 . . . . .	21
Figure 58	Alternate Letter R 9 × 9 . . . . .	21
Figure 59	Number One 7 × 9 . . . . .	21
Figure 60	Number Two 7 × 9 . . . . .	21
Figure 61	Number Three 7 × 9 . . . . .	21
Figure 62	Number Four 7 × 9 . . . . .	21
Figure 63	Number Five 7 × 9 . . . . .	21
Figure 64	Number Six 7 × 9 . . . . .	21
Figure 65	Number Seven 7 × 9 . . . . .	21
Figure 66	Preferred Number Eight 7 × 9 . . . . .	21
Figure 67	Number Nine 7 × 9 . . . . .	22
Figure 68	Number Zero 7 × 9 . . . . .	22
Figure 69	Letter A 7 × 9 . . . . .	22
Figure 70	Letter B 7 × 9 . . . . .	22
Figure 71	Letter C 7 × 9 . . . . .	22
Figure 72	Letter D 7 × 9 . . . . .	22
Figure 73	Letter E 7 × 9 . . . . .	22
Figure 74	Letter F 7 × 9 . . . . .	22
Figure 75	Letter G 7 × 9 . . . . .	22
Figure 76	Letter H 7 × 9 . . . . .	22
Figure 77	Letter I 7 × 9 . . . . .	22
Figure 78	Letter J 7 × 9 . . . . .	22
Figure 79	Letter K 7 × 9 . . . . .	22
Figure 80	Letter L 7 × 9 . . . . .	22
Figure 81	Letter M 7 × 9 . . . . .	22
Figure 82	Letter N 7 × 9 . . . . .	22
Figure 83	Letter O 7 × 9 . . . . .	23
Figure 84	Letter P 7 × 9 . . . . .	23
Figure 85	Letter Q 7 × 9 . . . . .	23
Figure 86	Letter R 7 × 9 . . . . .	23
Figure 87	Letter S 7 × 9 . . . . .	23

Figure 88	Letter T 7 × 9 . . . . .	23
Figure 89	Letter U 7 × 9 . . . . .	23
Figure 90	Letter V 7 × 9 . . . . .	23
Figure 91	Letter W 7 × 9 . . . . .	23
Figure 92	Letter X 7 × 9 . . . . .	23
Figure 93	Letter Y 7 × 9 . . . . .	23
Figure 94	Letter Z 7 × 9 . . . . .	23
Figure 95	Symbol Hook 7 × 9 . . . . .	23
Figure 96	Symbol Chair 7 × 9 . . . . .	23
Figure 97	Symbol Fork 7 × 9 . . . . .	23
Figure 98	Plus Sign 7 × 9 . . . . .	23
Figure 99	Minus Sign 7 × 9 . . . . .	24
Figure 100	Period (Decimal Point) 7 × 9 . . . . .	24
Figure 101	Slant 7 × 9 . . . . .	24
Figure 102	Dollar Sign 7 × 9 . . . . .	24
Figure 103	Greater Than Sign 7 × 9 . . . . .	24
Figure 104	Quotation Mark 7 × 9 . . . . .	24
Figure 105	Comma 7 × 9 . . . . .	24
Figure 106	Yen Sign 7 × 9 . . . . .	24
Figure 107	Less Than Sign 7 × 9 . . . . .	24
Figure 108	Alternate Number 8 7 × 9 . . . . .	24
Figure 109	Alternate Number 8 7 × 9 . . . . .	24
Figure 110	Number One 7 × 7 . . . . .	25
Figure 111	Number Two 7 × 7 . . . . .	25
Figure 112	Number Three 7 × 7 . . . . .	25
Figure 113	Number Four 7 × 7 . . . . .	25
Figure 114	Number Five 7 × 7 . . . . .	25
Figure 115	Number Six 7 × 7 . . . . .	25
Figure 116	Number Seven 7 × 7 . . . . .	25
Figure 117	Number Eight 7 × 7 . . . . .	25
Figure 118	Number Nine 7 × 7 . . . . .	25
Figure 119	Number Zero 7 × 7 . . . . .	25
Figure 120	Letter A 7 × 7 . . . . .	25
Figure 121	Letter C 7 × 7 . . . . .	25
Figure 122	Letter D 7 × 7 . . . . .	25
Figure 123	Letter M 7 × 7 . . . . .	25
Figure 124	Letter N 7 × 7 . . . . .	25
Figure 125	Letter P 7 × 7 . . . . .	25
Figure 126	Letter R 7 × 7 . . . . .	26
Figure 127	Letter U 7 × 7 . . . . .	26
Figure 128	Letter X 7 × 7 . . . . .	26
Figure 129	Letter Y 7 × 7 . . . . .	26
Figure 130	Symbol Hook 7 × 7 . . . . .	26
Figure 131	Symbol Chair 7 × 7 . . . . .	26
Figure 132	Symbol Fork 7 × 7 . . . . .	26
Figure 133	Plus Sign 7 × 7 . . . . .	26
Figure 134	Minus Sign 7 × 7 . . . . .	26
Figure 135	Period (Decimal Point) 7 × 7 . . . . .	26
Figure 136	Slant 7 × 7 . . . . .	26
Figure 137	Dollar Sign 7 × 7 . . . . .	26
Figure 138	Greater Than Sign 7 × 7 . . . . .	26
Figure 139	Quotation Mark 7 × 7 . . . . .	26
Figure 140	Number One 5 × 7 . . . . .	27

SECTION	PAGE
Figure 141 Number Two 5 × 7 . . . . .	27
Figure 142 Number Three 5 × 7 . . . . .	27
Figure 143 Number Four 5 × 7 . . . . .	27
Figure 144 Number Five 5 × 7 . . . . .	27
Figure 145 Number Six 5 × 7 . . . . .	27
Figure 146 Number Seven 5 × 7 . . . . .	27
Figure 147 Number Eight 5 × 7 . . . . .	27
Figure 148 Number Nine 5 × 7 . . . . .	27
Figure 149 Number Zero 5 × 7 . . . . .	27
Figure 150 Symbol Hook 5 × 7 . . . . .	27
Figure 151 Symbol Chair 5 × 7 . . . . .	27
Figure 152 Symbol Fork 5 × 7 . . . . .	27
Figure 153 Plus Sign 5 × 7 . . . . .	27
Figure 154 Minus Sign 5 × 7 . . . . .	27
Figure 155 Dollar Sign 5 × 7 . . . . .	27
Figure 156 5 × 7 Number Two, Dot Placement Limits. . . . .	28
Figure 157 7 × 7 Number Two, Dot Placement Limits. . . . .	28
Figure 158 7 × 9 Number Two, Dot Placement Limits. . . . .	28
Figure 159 9 × 9 Number Two, Dot Placement Limits. . . . .	28
Figure 160 7 × 7 Letter A, Dot Placement Limits. . . . .	29
Figure 161 7 × 9 Letter A, Dot Placement Limits. . . . .	29
Figure 162 9 × 9 Letter A, Dot Placement Limits. . . . .	29
Appendix Correspondence to ASCII Code Table. . . . .	30
Figure A1 Correspondence between OCR-MA Repertoire and ASCII Code Table. . . . .	31



# American National Standard for Information Systems –

# Optical Character Recognition (OCR) – Matrix Character Sets for OCR-MA

## 1. Scope, Purpose, and Application

**1.1 Scope.** This standard describes the matrix of dot placement and size limits for OCR-MA alphanumeric characters and symbols for optical character recognition (OCR) systems.

**1.2 Purpose.** The purpose of this standard is to establish a set of characters that can be generated by printing systems that produce characters with a matrix of dots and shall be used in optical character recognition systems. There are three different character groups illustrated to provide for the capability of many types of matrix printing devices and applications.

**1.3 Application.** This standard specifies the dot placement and size of OCR-MA. The standard does not specify the means to create characters. Both the impact and nonimpact printing technologies can be used to create these characters. This standard may be used as a design basis for devices used to print or read OCR-MA. The different character groups are provided to accommodate printer manufacturers and applications.

In any particular application, the indiscriminate use of more characters than actually required may result in additional costs and poorer performance. The smallest character group (OCR-MA1) is designed to accommodate minimum numeric requirements, and it includes the character group described in Implementation of the Numeric OCR-A Font with  $9 \times 9$  Matrix Printers, ECMA-51. Character group OCR-MA2 is primarily intended for applications using the character set in the NRMA Voluntary Retail Identification Standard Specification A. Character group OCR-MA3 is sufficient to handle the majority of OCR-MA applications, and it is the largest number of characters that can be accomplished at reasonable cost.

The implementation of a successful OCR system involves consideration beyond the scope of this standard. These considerations include such things as paper, ink characteristics, and character placement. These

subjects are discussed in detail in American National Standard for Paper Used in Optical Character Recognition (OCR) Systems, ANSI X3.62-1979, American National Standard for Optical Character Recognition (OCR) Inks, ANSI X3.86-1980, American National Standard for Optical Character Recognition (OCR) Character Positioning, ANSI X3.93M-1981, and American National Standard for Information Systems – Optical Character Recognition (OCR) – Guidelines for OCR Print Quality, ANSI X3.99-1983.

## 2. Referenced and Related Standards

**2.1 Referenced American National Standards.** This standard is intended to be used in conjunction with the following American National Standards. When these standards are superseded by a revision approved by the American National Standards Institute, Inc, the revision shall apply.

ANSI X3.4-1986, Information Systems – Coded Character Sets – 7-Bit American National Standard Code for Information Interchange (7-Bit ASCII)

ANSI X3.17-1981, Character Set for Optical Character Recognition (OCR-A)

ANSI X3.93M-1981, Optical Character Recognition (OCR) Character Positioning

ANSI X3.99-1983, Information Systems – Optical Character Recognition (OCR) – Guidelines for OCR Print Quality

**2.2 Related Standards.** These standards listed here for information only and are not essential for the completion of the requirements of this standard:

ANSI X3.62-1979, Paper Used in Optical Recognition (OCR) Systems

ANSI X3.86-1980, Optical Character Recognition (OCR) Inks

ECMA-42, Alphanumeric Character Set for 7 × 9 Matrix Printers<sup>1</sup>

ECMA-51, Implementation of Numeric OCR-A Font with 9 × 9 Matrix Printers<sup>1</sup>

DIN 66008, Font A for Optical Character Recognition, 9 × 9 Dot Matrix<sup>1</sup>

NRMA Voluntary Retail Identification Standard Specification A<sup>2</sup>

### 3. Definitions

**dot.** A generally circular area of suitable contrast to the background used to form a matrix.

**dot spacing.** The nominal distance between the centers of dots in adjacent row positions or adjacent column positions.

**matrix.** A rectangular array of printed dots organized in rows (horizontal) and columns (vertical). The matrix notation shall be the number of columns by (×) the number of rows.

### 4. Characters

**4.1 Character Shapes.** The character shapes for OCR-MA shall be similar to those for OCR-A, as defined in ANSI X3.17-1981, and shall be specified in one size only. This size is similar to size I in OCR-A. The nominal character width, when measured from the centerline of the first column position to the centerline of the last column position shall be 0.055 inch (1.40 mm). The nominal character height, when measured from the centerline of the bottom row position to the centerline of the top row position, shall be 0.094 inch (2.39 mm). The stroke width shall be determined by dot size limitations.

**4.1.1 Dot Size.** The dot size shall be determined by measuring the largest and smallest span of the dot in any direction through the center of the dot. The minimum dimension for dot size shall be 0.012 inch (0.305 mm) and the maximum dimension shall be 0.020 inch (0.508 mm). The dots shown in this standard are round, but any shape meeting the minimum and maximum dimensions shall be allowed. The dots may also be created by combining smaller dots as long as the

group of dots meets the minimum or maximum dimensional requirements. This is illustrated in Figure 1.

**4.1.2 Dot Spacing.** The spacing of dots used to form OCR-MA characters has a significant effect on the print quality of the characters. Closer spacing provides a more consistent stroke width. Dot locations are controlled by the dimensions on the matrices shown in Figures 2 through 5. The figures show the nominal point locations for the center of the dot.

**4.1.3 Dot Placement Limits (DPL).** To create a character that meets the requirements of this standard, dots (1) shall be located on the nominal matrices so they totally cover a diameter of 0.008 inch (0.20 mm) that is centered on the nominal matrix centerpoint location, and (2) shall not extend more than 0.012 inch (0.30 mm) from imaginary lines connecting all of the adjacent nominal matrix centerpoint locations of a character. These are the dot placement limits (DPL).

When constructed on a transparency for visual use, the DPL is called a DPL measuring gage. The DPL is unique for each character set. Examples of DPL gages are shown in Figures 156 through 162. Figures 156 through 159 illustrate the DPL gages for the number two. Figures 160 through 162 illustrate the DPL gages for the letter A.

The DPL measuring gage shall be constructed in all cases using the nominal matrices shown in Figures 2 through 5. The minimum DPL shall be constructed by creating a circle with a diameter of 0.008 inch (0.20 mm) at the intersection of the nominal centerlines for each nominal dot placement location. The maximum DPL shall be created by generating a circle with a diameter of 0.024 inch (0.61 mm) and moving it along all of the imaginary lines connecting the adjacent nominal dot-placement locations of a character.

**NOTE:** Since a dot has a maximum size of 0.020 inch (0.51 mm) it will not completely fill in the maximum DPL. The DPL is to measure dot location and character shape only. It is not used to measure the size of dots.

**4.2 Character Repertoire.** The character sets for the three OCR-MA character groups (OCR-MA1, OCR-MA2, and OCR-MA3) are shown in Table 1. Since the use of an unnecessarily large number of characters may result in greater cost and lower performance, the user should consult with the manufacturers of the reading and printing equipment regarding the minimum set required for an optimum OCR system.

**4.2.1 Alternate Character Shapes.** In the case of the 7 × 9 number 8, 9 × 9 number 0, and letter P and R, alternate character shapes have been specified. When alternate character shapes exist, the user should consult with the manufacturers of the reading and printing equipment to determine which character shape is required for an optimum OCR system.

<sup>1</sup> Available from the American National Standards Institute, 1430 Broadway, New York, NY 10018.

<sup>2</sup> Available from the National Retail Merchants Association, 100 West 31st Street, New York, NY 10001.




**Table 1**  
**OCR-MA Character Repertoire**

Character	Shape	Name	Character Groups		
			1	2	3
1	1	Number one	X	X	X
2	2	Number two	X	X	X
3	3	Number three	X	X	X
4	4	Number four	X	X	X
5	5	Number five	X	X	X
6	6	Number six	X	X	X
7	7	Number seven	X	X	X
8	8	Number eight	X	X	X
9	9	Number nine	X	X	X
0	0	Number zero	X	X	X
A	A	Letter A	—	X	X
B	B	Letter B	—	—	X
C	C	Letter C	—	X	X
D	D	Letter D	—	X	X
E	E	Letter E	—	—	X
F	F	Letter F	—	—	X
G	G	Letter G	—	—	X
H	H	Letter H	—	—	X
I	I	Letter I	—	—	X
J	J	Letter J	—	—	X
K	K	Letter K	—	—	X
L	L	Letter L	—	—	X
M	M	Letter M	—	X	X
N	N	Letter N	—	X	X
O	O	Letter O	—	—	X
P	P	Letter P	—	X	X
Q	Q	Letter Q	—	—	X
R	R	Letter R	—	X	X
S	S	Letter S	—	—	X
T	T	Letter T	—	—	X
U	U	Letter U	—	X	X
V	V	Letter V	—	—	X
W	W	Letter W	—	—	X
X	X	Letter X	—	X	X
Y	Y	Letter Y	—	X	X
Z	Z	Letter Z	—	—	X
5	5	Symbol hook	X	X	X
7	7	Symbol chair	X	X	X
4	4	Symbol fork	X	X	X
+	+	Plus sign	X	X	X
-	-	Minus sign	X	X	X
.	.	Period (decimal point)	X	X	X
/	/	Slant	—	X	X
\$	\$	Dollar sign	X	X	X
>	>	Greater than sign	—	X	X
"	"	Quotation mark	—	X	X
,	,	Comma	—	—	X
¥	¥	Yen sign	—	—	X
<	<	Less than sign	—	—	X



**4.2.2 Character SPACE.** The character SPACE is a blank area in a line of print, having a width equal to the character pitch (if the characters are printed 10 to the inch, the character pitch is 1/10 inch (2.54 mm)).

When a blank area is bounded by narrow characters (the first or last columns in the matrix do not contain dots) the narrow characters shall be assigned a width of 0.069 inch (1.75 mm) for the purpose of determining the number of SPACE characters between the printed characters.

**4.3 Use of Characters.** Data interchange applications shall follow the nominally assigned information content of ANSI X3.4-1986 (ASCII). Three special characters have been provided that are recommended for use when control symbols are required. These symbols are hook (  ), fork (  ), and chair (  ).

**4.4 Relative Character Spacing.** Details of character spacing are addressed in ANSI X3.93M-1981. For character positioning, a reference line for vertical positioning and a reference line for horizontal positioning shall be used. The reference line for vertical positioning, relative to line spacing, is the "baseline." The reference line for horizontal positioning, relative to line spacing, is the "centerline." In all cases, for OCR-MA, the baseline shall be the bottom horizontal line in any matrix, indicated by position 0.0000 inch (0.000 mm) in Figures 2 through 5, and the centerline shall be the middle vertical line in any matrix, indicated by the position that marks 0.0275 inch or 0.698 mm in the figures.

The characters in a row are properly aligned vertically when their baselines are collinear. Certain characters are displaced above the common baseline. The vertical locations of these characters are determined by the dot placement on the matrices.

**4.4.1 Line Spacing.** In order to maintain an adequate separation between lines of characters, the nominal number of lines per inch (25.4 mm) shall not exceed 6. To ensure a sufficient separation between lines of characters, the minimum distance from the lowest vertical extension of one line of characters to the highest vertical extension of the next lower line of characters shall be 0.025 inch (0.64 mm). The line spacing that can be successfully scanned by an OCR reader differs from reader to reader. The user is advised to consult with the OCR equipment manufacturer when the line spacing is denser than 3 lines per inch (25.4 mm).

**4.4.2 Character Spacing.** Character spacing less than the minimum spacing specifications may prevent the OCR reader from totally recovering after reading the previous character. Character spacing that approaches the maximum allowable spacing may result in a recognized character space. The nominal spacing between the vertical centerlines of adjacent characters should

be 0.100 inch (2.54 mm) to 0.110 inch (2.79 mm) for efficient printing and equipment reading of matrix OCR-MA characters. Minimum spacing between the vertical centerlines of any adjacent characters shall be 0.090 inch (2.29 mm). Maximum spacing between the vertical centerlines of any adjacent character shall be 0.180 inch (4.57 mm). The user is advised to consult with the OCR equipment manufacturer to determine the reader's character spacing specifications.

**4.4.3 Minimum Character Separation.** The minimum distance between the outside edge of any dot printed in the last used column of a character matrix and the outside edge of any dot printed in the first used column of the next character matrix shall be 0.014 inch (0.36 mm).

**4.5 Print Quality.** For details of print quality, see ANSI X3.99-1983. In general, the print quality for OCR-MA characters shall meet the requirements of quality range *y* as stated in ANSI X3.99-1983. Exceptions to ANSI X3.99-1983 are detailed in this section.

**4.5.1 Measurement of Print Image Contrast.** Since matrix characters are created with dots on a specific matrix, measurements of the contrast as related to the background medium (print contrast signal) and measurements of contrast within a character (contrast variation ratio) shall be taken from the nominal centerpoint location of the dots on the matrix. This means that certain features within the character body that would be considered nonallowable voids in OCR-A shall be allowed in OCR-MA. A void that falls on a line between the nominal centerpoints of two adjacent dots shall be allowed. This type of void may occur on a horizontal line between dots located in adjacent columns, on a vertical line between dots located in adjacent rows, or on a sloped line between dots located in different columns and rows. An example of this condition can be observed from Figures 13, 116, and 146, showing the dot locations for the character 7.

**4.5.2 Print Contrast Signal (PCS).** The print contrast signal (PCS) is an expression that relates the contrast between selected points of interest within a printed character, and the background medium. The PCS value of a Point P is defined by the equation:

$$PCS = \frac{R_w - R_p}{R_w}$$

where

$R_w$  = the maximum reflectance of the background medium found within 0.060 inch (1.50 mm) of the edge of a printed character.

$R_p$  = the reflectance from a measured area centered on Point P, the nominal centerpoint location of any of the dots that form the character.

For OCR-MA, the reflectance values for  $R_w$  and  $R_p$  shall be measured within a circular area (aperture) of 0.008 inch (0.20 mm) in diameter.

The minimum PCS of all dots with a nominal dot size equal to or greater than 0.014 inch (0.36 mm) shall be 0.50. The minimum PCS of all dots with a nominal dot size less than 0.014 inch (0.36 mm) and equal to or greater than 0.012 inch (0.30 mm) shall increase proportionally from 0.50 for a 0.014-inch (0.36-mm) dot to 0.60 for a 0.012-inch (0.30-mm) dot. This is shown graphically in Figure 6.

**4.5.3 Contrast Variation Ratio.** The variation of contrast in a character is expressed by the contrast variation ratio (CVR), which is defined as:

$$\text{CVR} = \frac{\text{PCS max}}{\text{PCS min}}$$

where

PCS min = the lowest PCS level of an area covered by a circle 0.008 inch (0.20 mm) in diameter, located on any nominal center-point location of the dots in a character.

PCS max = the highest PCS level of an area covered by a circle 0.008 inch (0.20 mm) in diameter, located on any nominal center-point location of the dots in a character.

The CVR shall be less than or equal to 1.8.

**4.5.4 Voids.** Voids are areas where the printing process does not deposit sufficient material on the printed media. Voids have significantly higher reflectance than other areas of the printed image. Voids shall be allowed if they do not reduce the PCS min, as described in 4.5.3, below a value of 0.50.

**4.5.5 Spot.** Spots are areas located within 0.060 inch (1.50 mm) of a printed character, that contrast with the printed media. Spots may be allowable or nonallowable based on size and PCS level. For adjacent characters, spots should be related to the closest character. Spots shall be allowed if they have an area less than the area described by moving a circle, 0.008 inch (0.20 mm) in diameter, along a straight line for a distance of 0.004 inch (0.10 mm), and if they have a PCS value less than 0.30.

**4.5.6 Edge Irregularity.** It is inherent that edge irregularities will occur in characters created with a matrix of dots with a dot spacing that is greater than one-half of a dot size. Edge irregularities shall be allowable when it is obvious that they occur as a result of correct matrix printing as illustrated in this standard. Edge irregularities that occur owing to smearing or uncontrolled ink spread shall be subject to the same limitations for quality range  $y$  that is specified in ANSI X3.99-1983.

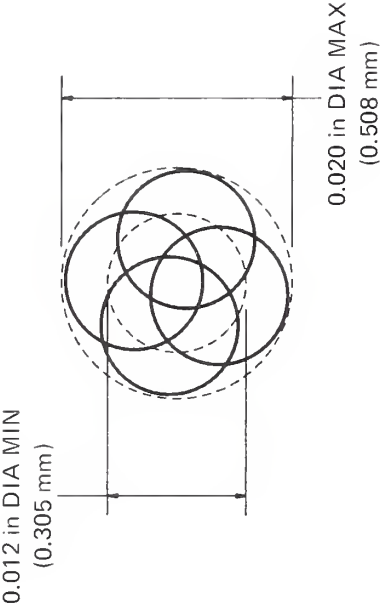


Figure 1  
Dot Size Dimensions

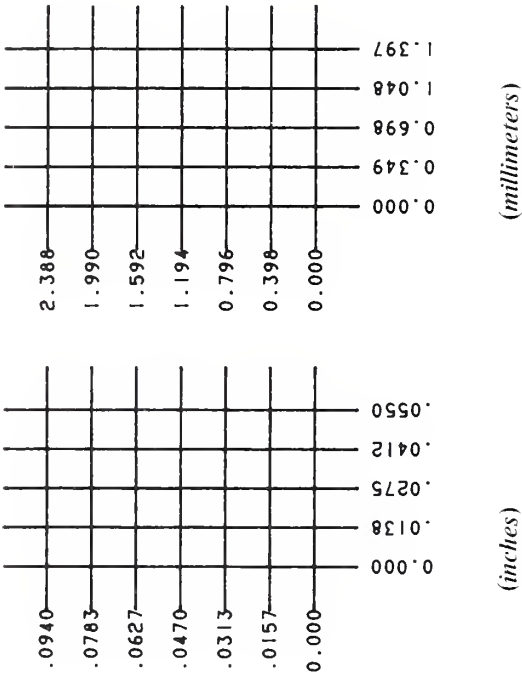


Figure 2  
5 X 7 Matrix Dimensions

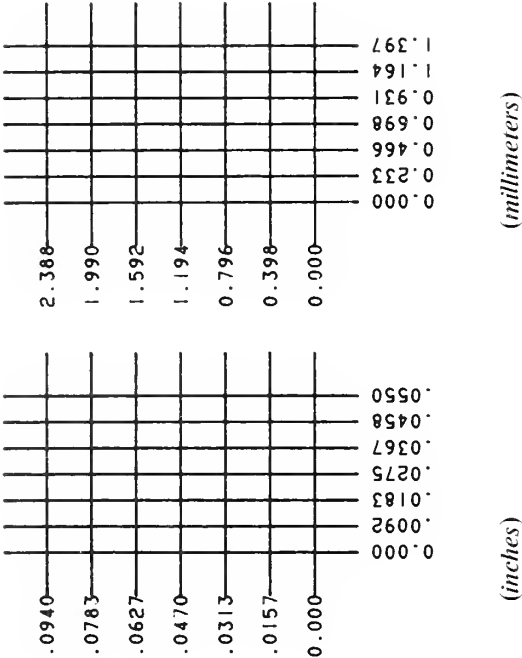


Figure 3  
7 X 7 Matrix Dimensions

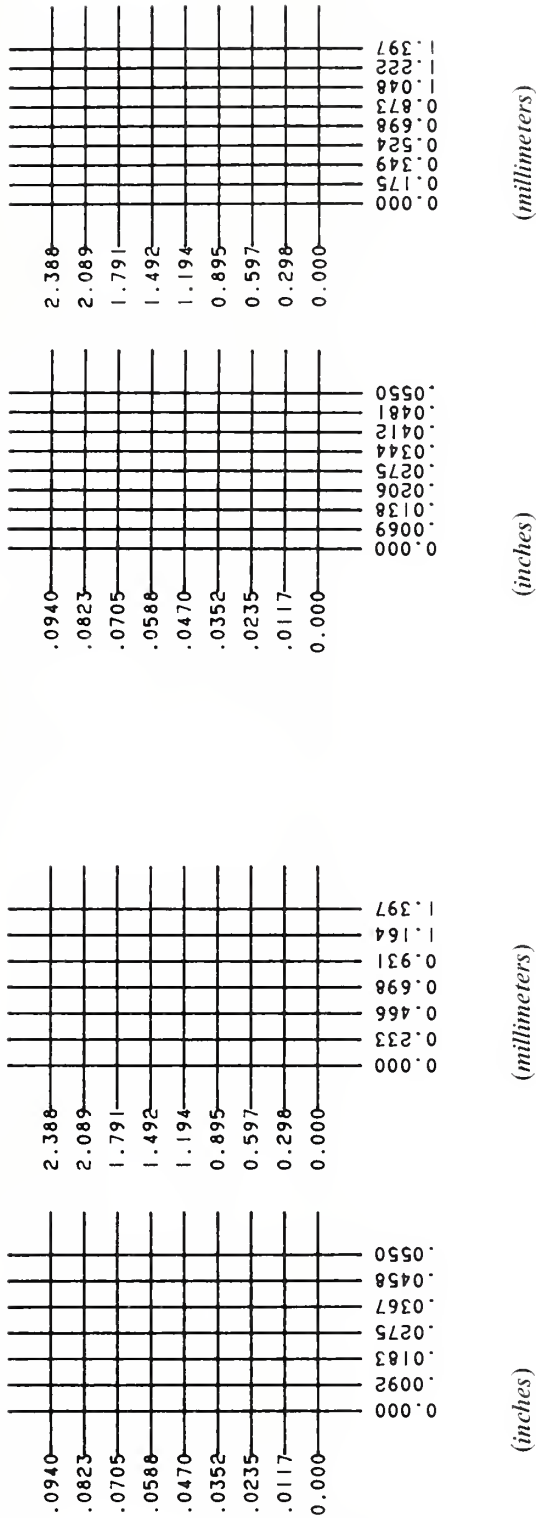


Figure 4  
7 X 9 Matrix Dimensions

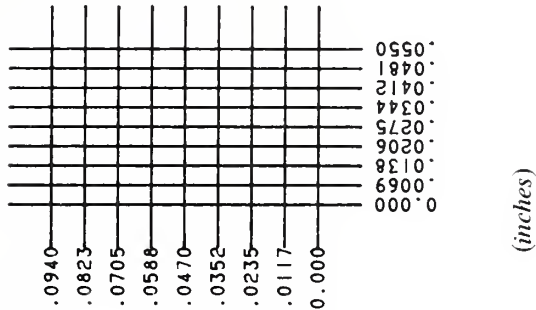


Figure 5  
9 X 9 Matrix Dimensions

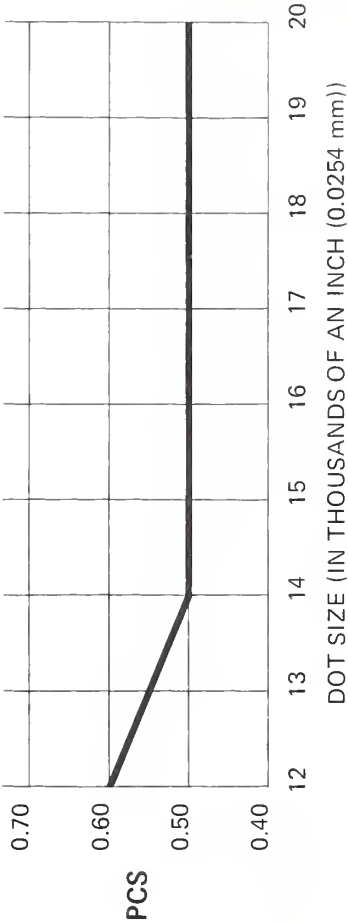


Figure 6  
Minimum PCS as a Function of Dot Size




Figure 7  
Number One  
9 × 9



Figure 8  
Number Two  
9 × 9




Figure 9  
Number Three  
9 × 9




Figure 10  
Number Four  
9 × 9




Figure 11  
Number Five  
9 × 9




Figure 12  
Number Six  
9 × 9



Figure 13  
Number Seven  
9 × 9




Figure 14  
Number Eight  
9 × 9




Figure 15  
Number Nine  
9 × 9




Figure 16  
Preferred Number Zero  
9 × 9



Figure 17  
Letter A  
9 × 9




Figure 18  
Letter B  
9 × 9



Figure 19  
Letter C  
9 × 9



Figure 20  
Letter D  
9 × 9




Figure 21  
Letter E  
9 × 9



Figure 22  
Letter F  
9 × 9





Figure 23  
Letter G  
9 × 9




Figure 24  
Letter H  
9 × 9




Figure 25  
Letter I  
9 × 9




Figure 26  
Letter J  
9 × 9




Figure 27  
Letter K  
9 × 9




Figure 28  
Letter L  
9 × 9



Figure 29  
Letter M  
9 × 9



Figure 30  
Letter N  
9 × 9




Figure 31  
Letter O  
9 × 9




Figure 32  
Preferred Letter P  
9 × 9




Figure 33  
Letter Q  
9 × 9



Figure 34  
Preferred Letter R  
9 × 9




Figure 35  
Letter S  
9 × 9




Figure 36  
Letter T  
9 × 9




Figure 37  
Letter U  
9 × 9



Figure 38  
Letter V  
9 × 9




Figure 39  
Letter W  
9 × 9



Figure 40  
Letter X  
9 × 9



Figure 41  
Letter Y  
9 × 9



Figure 42  
Letter Z  
9 × 9




Figure 43  
Symbol Hook  
9 × 9




Figure 44  
Symbol Chair  
9 × 9




Figure 45  
Symbol Fork  
9 × 9




Figure 46  
Plus Sign  
9 × 9




Figure 47  
Minus Sign  
9 × 9




Figure 48  
Period (Decimal Point)  
9 × 9




Figure 49  
Slant  
9 × 9




Figure 50  
Dollar Sign  
9 × 9




Figure 51  
Greater Than Sign  
9 × 9




Figure 52  
Quotation Mark  
9 × 9



Figure 53  
Comma  
9 × 9



Figure 54  
Yen Sign  
9 × 9






Figure 55  
Less Than Sign  
 $9 \times 9$




Figure 56  
Alternate Number Zero  
 $9 \times 9$



Figure 57  
Alternate Letter P  
 $9 \times 9$



Figure 58  
Alternate Letter R  
 $9 \times 9$




Figure 59  
Number One  
 $7 \times 9$




Figure 60  
Number Two  
 $7 \times 9$




Figure 61  
Number Three  
 $7 \times 9$




Figure 62  
Number Four  
 $7 \times 9$




Figure 63  
Number Five  
 $7 \times 9$




Figure 64  
Number Six  
 $7 \times 9$



Figure 65  
Number Seven  
 $7 \times 9$




Figure 66  
Preferred Number Eight  
 $7 \times 9$




Figure 67  
Number Nine  
7 × 9




Figure 68  
Number Zero  
7 × 9



Figure 69  
Letter A  
7 × 9




Figure 70  
Letter B  
7 × 9



Figure 71  
Letter C  
7 × 9




Figure 72  
Letter D  
7 × 9




Figure 73  
Letter E  
7 × 9




Figure 74  
Letter F  
7 × 9




Figure 75  
Letter G  
7 × 9




Figure 76  
Letter H  
7 × 9




Figure 77  
Letter I  
7 × 9




Figure 78  
Letter J  
7 × 9




Figure 79  
Letter K  
7 × 9




Figure 80  
Letter L  
7 × 9




Figure 81  
Letter M  
7 × 9




Figure 82  
Letter N  
7 × 9




Figure 83  
Letter O  
7 × 9




Figure 84  
Letter P  
7 × 9



Figure 85  
Letter Q  
7 × 9



Figure 86  
Letter R  
7 × 9




Figure 87  
Letter S  
7 × 9




Figure 88  
Letter T  
7 × 9




Figure 89  
Letter U  
7 × 9




Figure 90  
Letter V  
7 × 9




Figure 91  
Letter W  
7 × 9



Figure 92  
Letter X  
7 × 9



Figure 93  
Letter Y  
7 × 9




Figure 94  
Letter Z  
7 × 9




Figure 95  
Symbol Hook  
7 × 9




Figure 96  
Symbol Chair  
7 × 9




Figure 97  
Symbol Fork  
7 × 9




Figure 98  
Plus Sign  
7 × 9






Figure 99  
Minus Sign  
7 × 9




Figure 100  
Period (Decimal Point)  
7 × 9



Figure 101  
Slant  
7 × 9



Figure 102  
Dollar Sign  
7 × 9




Figure 103  
Greater Than Sign  
7 × 9




Figure 104  
Quotation Mark  
7 × 9




Figure 105  
Comma  
7 × 9



Figure 106  
Yen Sign  
7 × 9



Figure 107  
Less Than Sign  
7 × 9




Figure 108  
Alternate Number 8  
7 × 9



Figure 109  
Alternate Number 8  
7 × 9




Figure 110  
Number One  
7 × 7




Figure 111  
Number Two  
7 × 7




Figure 112  
Number Three  
7 × 7




Figure 113  
Number Four  
7 × 7




Figure 114  
Number Five  
7 × 7




Figure 115  
Number Six  
7 × 7




Figure 116  
Number Seven  
7 × 7




Figure 117  
Number Eight  
7 × 7




Figure 118  
Number Nine  
7 × 7




Figure 119  
Number Zero  
7 × 7




Figure 120  
Letter A  
7 × 7




Figure 121  
Letter C  
7 × 7




Figure 122  
Letter D  
7 × 7




Figure 123  
Letter M  
7 × 7




Figure 124  
Letter N  
7 × 7




Figure 125  
Letter P  
7 × 7




Figure 126  
Letter R  
7 × 7




Figure 127  
Letter U  
7 × 7




Figure 128  
Letter X  
7 × 7




Figure 129  
Letter Y  
7 × 7




Figure 130  
Symbol Hook  
7 × 7




Figure 131  
Symbol Chair  
7 × 7




Figure 132  
Symbol Fork  
7 × 7




Figure 133  
Plus Sign  
7 × 7




Figure 134  
Minus Sign  
7 × 7




Figure 135  
Period (Decimal Point)  
7 × 7




Figure 136  
Slant  
7 × 7




Figure 137  
Dollar Sign  
7 × 7




Figure 138  
Greater Than Sign  
7 × 7




Figure 139  
Quotation Mark  
7 × 7






Figure 140  
Number One  
 $5 \times 7$




Figure 141  
Number Two  
 $5 \times 7$




Figure 142  
Number Three  
 $5 \times 7$




Figure 143  
Number Four  
 $5 \times 7$




Figure 144  
Number Five  
 $5 \times 7$




Figure 145  
Number Six  
 $5 \times 7$




Figure 146  
Number Seven  
 $5 \times 7$




Figure 147  
Number Eight  
 $5 \times 7$




Figure 148  
Number Nine  
 $5 \times 7$




Figure 149  
Number Zero  
 $5 \times 7$




Figure 150  
Symbol Hook  
 $5 \times 7$




Figure 151  
Symbol Chair  
 $5 \times 7$




Figure 152  
Symbol Fork  
 $5 \times 7$




Figure 153  
Plus Sign  
 $5 \times 7$




Figure 154  
Minus Sign  
 $5 \times 7$




Figure 155  
Dollar Sign  
 $5 \times 7$



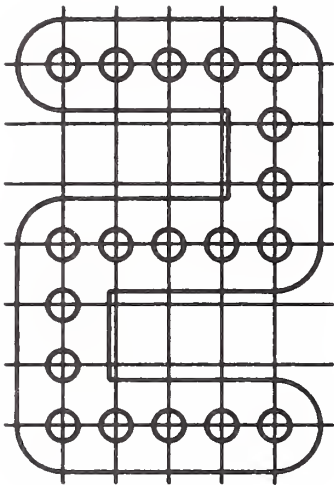


Figure 156  
5 × 7 Number Two  
Dot Placement Limits

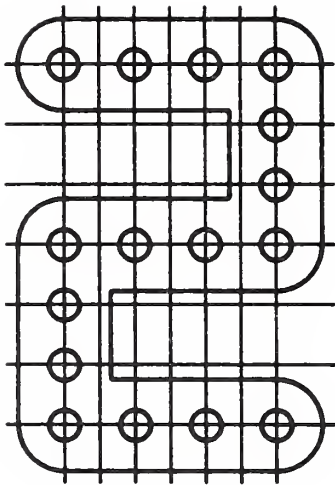


Figure 157  
7 × 7 Number Two  
Dot Placement Limits

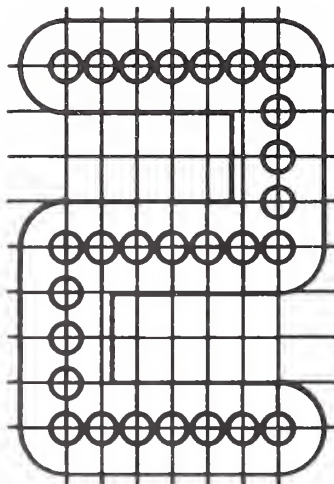


Figure 158  
7 × 9 Number Two  
Dot Placement Limits

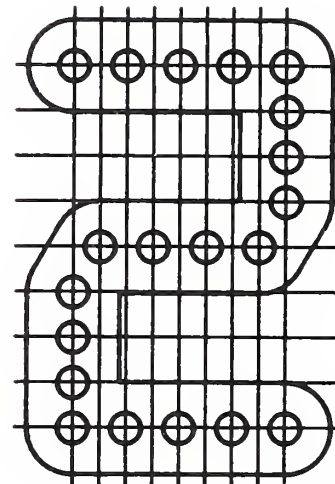


Figure 159  
9 × 9 Number Two  
Dot Placement Limits

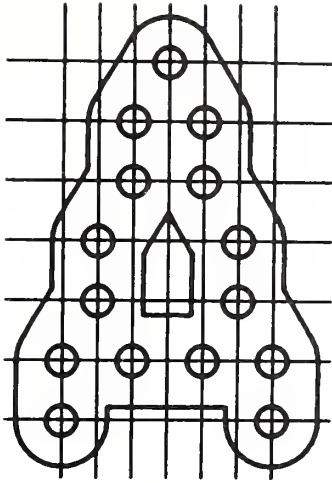


Figure 160  
7 × 7 Letter A  
Dot Placement Limits

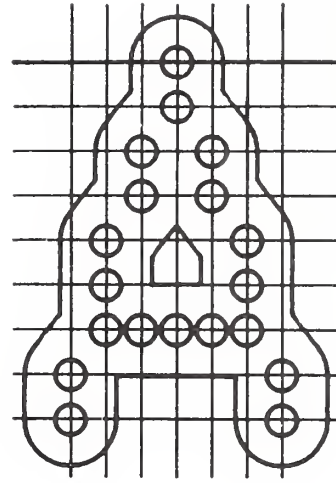


Figure 161  
7 × 9 Letter A  
Dot Placement Limits

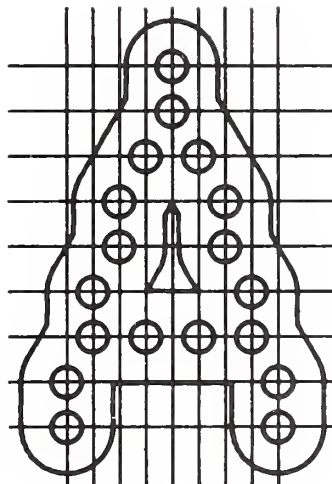


Figure 162  
9 × 9 Letter A  
Dot Placement Limits

Correspondence to the ASCII Code Table

Figure A1 is included to indicate a correspondence between the characters of this standard and those graphics used in Table 8 of American National Standard for Information Systems — Coded Character Sets — 7-Bit American National Standard Code for Information Interchange (7-Bit ASCII), ANSI X3.4-1986. Note that the three symbols, Hook, Fork, and Chair, can be used as control symbols or to represent the characters, tilde, underline, and grave accent, respectively. For forms interchange applications using these characters, there has to be agreement as to their use. If the abstract symbols are to be transmitted, they should be assigned to the code table positions as shown in Figure A1.

Figure A1 is given as an example for reference purposes only, and no specific correspondence is prescribed between the characters of this standard and those of ANSI X3.4-1986, other than that which is understood by the users.

					b <sub>7</sub>	0	0	0	0	1	1	1	1
					b <sub>6</sub>	0	0	1	1	0	0	1	1
					b <sub>5</sub>	0	1	0	1	0	1	0	1
					(1)	0	1	2	3	4	5	6	7
b <sub>4</sub>	b <sub>3</sub>	b <sub>2</sub>	b <sub>1</sub>	(1)	0	1	2	3	4	5	6	7	
0	0	0	0	0	NUL	DLE		0		P	h <sup>(5)</sup>		
0	0	0	1	1	SOH	DC1		1	A	Q			
0	0	1	0	2	STX	DC2	"	2	B	R			
0	0	1	1	3	ETX	DC3		3	C	S			
0	1	0	0	4	EOT	DC4	\$	4	D	T			
0	1	0	1	5	ENQ	NAK		5	E	U			
0	1	1	0	6	ACK	SYN		6	F	V			
0	1	1	1	7	BEL	ETB		7	G	W			
1	0	0	0	8	BS	CAN		8	H	X			
1	0	0	1	9	HT	EM		9	I	Y			
1	0	1	0	10	LF	SUB <sup>(2)</sup>			J	Z			
1	0	1	1	11	VT	ESC	+		K				
1	1	0	0	12	FF	FS	,	<	L	¥ <sup>(3)</sup>			
1	1	0	1	13	CR	GR	-		M				
1	1	1	0	14	SO	RS	•	>	N				ſ <sup>(6)</sup>
1	1	1	1	15	SI	US	/		O	Ψ <sup>(4)</sup>			

NOTES:

- (1) b<sub>1</sub> is the low-order bit.
- (2) This code is used to represent an OCR reject and has no associated symbol.
- (3) This code position normally contains a non-OCR character, the Reverse Slash. Its assignment to the Yen Sign is not intended to preclude the use of the Reverse Slash, except where the Yen Sign is required for specific OCR applications.
- (4) This code position normally contains a non-OCR character, the Underline. Its assignment to the Symbol Fork is not intended to preclude the use of the Underline, except where the Symbol Fork is required for specific OCR applications.
- (5) This code position normally contains a non-OCR character, the Acute Accent. Its assignment to the Symbol Chair is not intended to preclude the use of the Acute Accent, except where the Symbol Chair is required for specific OCR applications.
- (6) This code position normally contains a non-OCR character, the Tilde. Its assignment to the Symbol Hook is not intended to preclude the use of the Tilde, except where the Symbol Hook is required for specific OCR applications.

Figure A1  
Correspondence between OCR-MA Repertoire and ASCII Code Table



**X3.115-1984** Unformatted 80 Megabyte Trident Pack for Use at 370 tpi and 6000 bpi (General, Physical, and Magnetic Characteristics)

**X3.116-1986** Recorded Magnetic Tape Cartridge, 4-Track, Serial 0.250 Inch (6.30 mm) 6400 bpi (252 bpmm), Inverted Modified Frequency Modulation Encoded

**X3.117-1984** Printable/Image Areas for Text and Facsimile Communication Equipment

**X3.118-1984** Financial Services — Personal Identification Number — PIN Pad

**X3.119-1984** Contact Start/Stop Storage Disk, 158361 Flux Transitions per Track, 8.268 Inch (210 mm) Outer Diameter and 3.937 inch (100 mm) Inner Diameter

**X3.120-1984** Contact Start/Stop Storage Disk

**X3.121-1984** Two-Sided, Unformatted, 8-Inch (200-mm), 48-tpi, Double-Density, Flexible Disk Cartridge for 13 262 ftpr Two-Headed Application

**X3.122-1986** Computer Graphics Metafile for the Storage and Transfer of Picture Description Information

**X3.124-1985** Graphical Kernel System (GKS) Functional Description

**X3.124.1-1985** Graphical Kernel System (GKS) FORTRAN Binding

**X3.125-1985** Two-Sided, Double-Density, Unformatted 5.25-inch (130-mm), 48-tpi (1,9-tpmm), Flexible Disk Cartridge for 7958 bpr Use

**X3.126-1986** One- or Two-Sided Double-Density Unformatted 5.25-inch (130-mm), 96 Tracks per Inch, Flexible Disk Cartridge

**X3.127-1987** Unrecorded Magnetic Tape Cartridge for Information Interchange

**X3.128-1986** Contact Start-Stop Storage Disk — 83 000 Flux Transitions per Track, 130-mm (5.118-in) Outer Diameter and 40-mm (1.575-in) Inner Diameter

**X3.129-1986** Intelligent Peripheral Interface, Physical Level

**X3.130-1986** Intelligent Peripheral Interface, Logical Device Specific Command Sets for Magnetic Disk Drive

**X3.131-1986** Small Computer Systems Interface

**X3.132-1987** Intelligent Peripheral Interface — Logical Device Generic Command Set for Optical and Magnetic Disks

**X3.133-1986** Database Language — NDL

**X3.135-1986** Database Language — SQL

**X3.136-1986** Serial Recorded Magnetic Tape Cartridge for Information Interchange, Four and Nine Track

**X3.139-1987** Fiber Distributed Data Interface (FDDI) Token Ring Media Access Control (MAC)

**X3.140-1986** Open Systems Interconnection — Connection Oriented Transport Layer Protocol Specification

**X3.141-1987** Data Communication Systems and Services — Measurement Methods for User-Oriented Performance Evaluation

**X3.146-1987** Device Level Interface for Streaming Cartridge and Cassette Tape Drives

**X3.147-1987** Intelligent Peripheral Interface — Logical Device Generic Command Set for Magnetic Tapes

**X3.153-1987** Open Systems Interconnection — Basic Connection Oriented Session Protocol Specification

**X11.1-1977** Programming Language MUMPS

**IEEE 416-1978** Abbreviated Test Language for All Systems (ATLAS)

**IEEE 716-1982** Standard C/ATLAS Language

**IEEE 717-1982** Standard C/ATLAS Syntax

**IEEE 770X3.97-1983** Programming Language PASCAL

**IEEE 771-1980** Guide to the Use of ATLAS

**ISO 8211-1986** Specifications for a Data Descriptive File for Information Interchange

**MIL-STD-1815A-1983** Reference Manual for the Ada Programming Language

**NBS-ICST 1-1986** Fingerprint Identification — Data Format for Information Interchange

---

**X3/TRI-82** Dictionary for Information Processing Systems (Technical Report)



# American National Standards for Information Processing

- X3.1-1976** Synchronous Signaling Rates for Data Transmission
- X3.2-1970** Print Specifications for Magnetic Ink Character Recognition
- X3.4-1986** Coded Character Sets — 7-Bit ASCII
- X3.5-1970** Flowchart Symbols and Their Usage
- X3.6-1965** Perforated Tape Code
- X3.9-1978** Programming Language FORTRAN
- X3.11-1969** General Purpose Paper Cards
- X3.14-1983** Recorded Magnetic Tape (200 CPI, NRZI)
- X3.15-1976** Bit Sequencing of the American National Standard Code for Information Interchange in Serial-by-Bit Data Transmission
- X3.16-1976** Character Structure and Character Parity Sense for Serial-by-Bit Data Communication in the American National Standard Code for Information Interchange
- X3.17-1981** Character Set for Optical Character Recognition (OCR-A)
- X3.18-1974** One-Inch Perforated Paper Tape
- X3.19-1974** Eleven-Sixteenths-Inch Perforated Paper Tape
- X3.20-1967** Take-Up Reels for One-Inch Perforated Tape
- X3.21-1967** Rectangular Holes in Twelve-Row Punched Cards
- X3.22-1983** Recorded Magnetic Tape (800 CPI, NRZI)
- X3.23-1985** Programming Language COBOL
- X3.25-1976** Character Structure and Character Parity Sense for Parallel-by-Bit Data Communication in the American National Standard Code for Information Interchange
- X3.26-1980** Hollerith Punched Card Code
- X3.27-1978** Magnetic Tape Labels and File Structure
- X3.28-1976** Procedures for the Use of the Communication Control Characters of American National Standard Code for Information Interchange in Specified Data Communication Links
- X3.29-1971** Specifications for Properties of Unpunched Oiled Paper Perforator Tape
- X3.30-1986** Representation for Calendar Date and Ordinal Date
- X3.31-1973** Structure for the Identification of the Counties of the United States
- X3.32-1973** Graphic Representation of the Control Characters of American National Standard Code for Information Interchange
- X3.34-1972** Interchange Rolls of Perforated Tape
- X3.37-1980** Programming Language APT
- X3.38-1972** Identification of States of the United States (Including the District of Columbia)
- X3.39-1986** Recorded Magnetic Tape (1600 CPI, PE)
- X3.40-1983** Unrecorded Magnetic Tape (9-Track 800 CPI, NRZI; 1600 CPI, PE; and 6250 CPI, GCR)
- X3.41-1974** Code Extension Techniques for Use with the 7-Bit Coded Character Set of American National Standard Code for Information Interchange
- X3.42-1975** Representation of Numeric Values in Character Strings
- X3.43-1986** Representations of Local Time of Day
- X3.44-1974** Determination of the Performance of Data Communication Systems
- X3.45-1982** Character Set for Handprinting
- X3.46-1974** Unrecorded Magnetic Six-Disk Pack (General, Physical, and Magnetic Characteristics)
- X3.47-1977** Structure for the Identification of Named Populated Places and Related Entities of the States of the United States for Information Interchange
- X3.48-1986** Magnetic Tape Cassettes (3.81-mm [0.150-Inch] Tape at 32 bps [800 bpi], PE)
- X3.49-1975** Character Set for Optical Character Recognition (OCR-B)
- X3.50-1986** Representations for U.S. Customary, SI, and Other Units to Be Used in Systems with Limited Character Sets
- X3.51-1986** Representations of Universal Time, Local Time Differentials, and United States Time Zone References
- X3.52-1976** Unrecorded Single-Disk Cartridge (Front Loading, 2200 BPI) (General, Physical, and Magnetic Requirements)
- X3.53-1976** Programming Language PL/I
- X3.54-1986** Recorded Magnetic Tape (6250 CPI, Group Coded Recording)
- X3.55-1982** Unrecorded Magnetic Tape Cartridge, 0.250 Inch (6.30 mm), 1600 bpi (63 bps), Phase encoded
- X3.56-1986** Recorded Magnetic Tape Cartridge, 4 Track, 0.250 Inch (6.30 mm), 1600 bpi (63 bps), Phase Encoded
- X3.57-1977** Structure for Formatting Message Headings Using the American National Standard Code for Information Interchange for Data Communication Systems Control
- X3.58-1977** Unrecorded Eleven-Disk Pack (General, Physical, and Magnetic Requirements)
- X3.60-1978** Programming Language Minimal BASIC
- X3.61-1986** Representation of Geographic Point Locations
- X3.62-1987** Paper Used in Optical Character Recognition (OCR) Systems
- X3.63-1981** Unrecorded Twelve-Disk Pack (100 Megabytes) (General, Physical, and Magnetic Requirements)
- X3.64-1979** Additional Controls for Use with American National Standard Code for Information Interchange
- X3.66-1979** Advanced Data Communication Control Procedures (ADCCP)
- X3.72-1981** Parallel Recorded Magnetic Tape Cartridge, 4 Track, 0.250 Inch (6.30 mm), 1600 bpi (63 bps), Phase Encoded
- X3.73-1980** Single-Sided Unformatted Flexible Disk Cartridge (for 6631-BPR Use)
- X3.74-1981** Programming Language PL/I, General-Purpose Subset
- X3.76-1981** Unformatted Single-Disk Cartridge (Top Loading, 200 tpi 4400 bpi) (General, Physical, and Magnetic Requirements)
- X3.77-1980** Representation of Pocket Select Characters
- X3.78-1981** Representation of Vertical Carriage Positioning Characters in Information Interchange
- X3.79-1981** Determination of Performance of Data Communications Systems That Use Bit-Oriented Communication Procedures
- X3.80-1981** Interfaces between Flexible Disk Cartridge Drives and Their Host Controllers
- X3.82-1980** One-Sided Single-Density Unformatted 5.25-Inch Flexible Disk Cartridge (for 3979-BPR Use)
- X3.83-1980** ANSI Sponsorship Procedures for ISO Registration According to ISO 2375
- X3.84-1981** Unformatted Twelve-Disk Pack (200 Megabytes) (General, Physical, and Magnetic Requirements)
- X3.85-1981** 1/2-Inch Magnetic Tape Interchange Using a Self Loading Cartridge
- X3.86-1980** Optical Character Recognition (OCR) Inks
- X3.88-1981** Computer Program Abstracts
- X3.89-1981** Unrecorded Single-Disk, Double-Density Cartridge (Front Loading, 2200 bpi, 200 tpi) (General, Physical, and Magnetic Requirements)
- X3.91M-1987** Storage Module Interfaces
- X3.92-1981** Data Encryption Algorithm
- X3.93M-1981** OCR Character Positioning
- X3.94-1985** Programming Language PASCAL
- X3.95-1982** Microprocessors — Hexadecimal Input/Output, Using 5-Bit and 7-Bit Teleprinters
- X3.96-1983** Continuous Business Forms (Single-Part)
- X3.98-1983** Text Information Interchange in Page Image Format (PIF)
- X3.99-1983** Print Quality Guideline for Optical Character Recognition (OCR)
- X3.100-1983** Interface Between Data Terminal Equipment and Data Circuit-Terminating Equipment for Packet Mode Operation with Packet Switched Data Communications Network
- X3.101-1984** Interfaces Between Rigid Disk Drive(s) and Host(s)
- X3.102-1983** Data Communication Systems and Services — User-Oriented Performance Parameters
- X3.103-1983** Unrecorded Magnetic Tape Minicassette for Information Interchange, Coplanar 3.81 mm (0.150 in)
- X3.104-1983** Recorded Magnetic Tape Minicassette for Information Interchange, Coplanar 3.81 mm (0.150 in), Phase Encoded
- X3.105-1983** Data Link Encryption
- X3.106-1983** Modes of Operation for the Data Encryption Algorithm
- X3.110-1983** Videotex/Teletext Presentation Level Protocol Syntax
- X3.111-1986** Optical Character Recognition (OCR) Matrix Character Sets for OCR-M
- X3.112-1984** 14-in (356-mm) Diameter Low-Surface-Friction Magnetic Storage Disk
- X3.113-1987** Programming Language FULL BASIC
- X3.114-1984** Alphanumeric Machines; Coded Character Sets for Keyboard Arrangements in ANSI X4.23-1982 and X4.22-1983

(Continued on reverse)